


# EPOXY TERRAZZO

THE ULTIMATE SEAMLESS  
DECORATIVE FLOORING



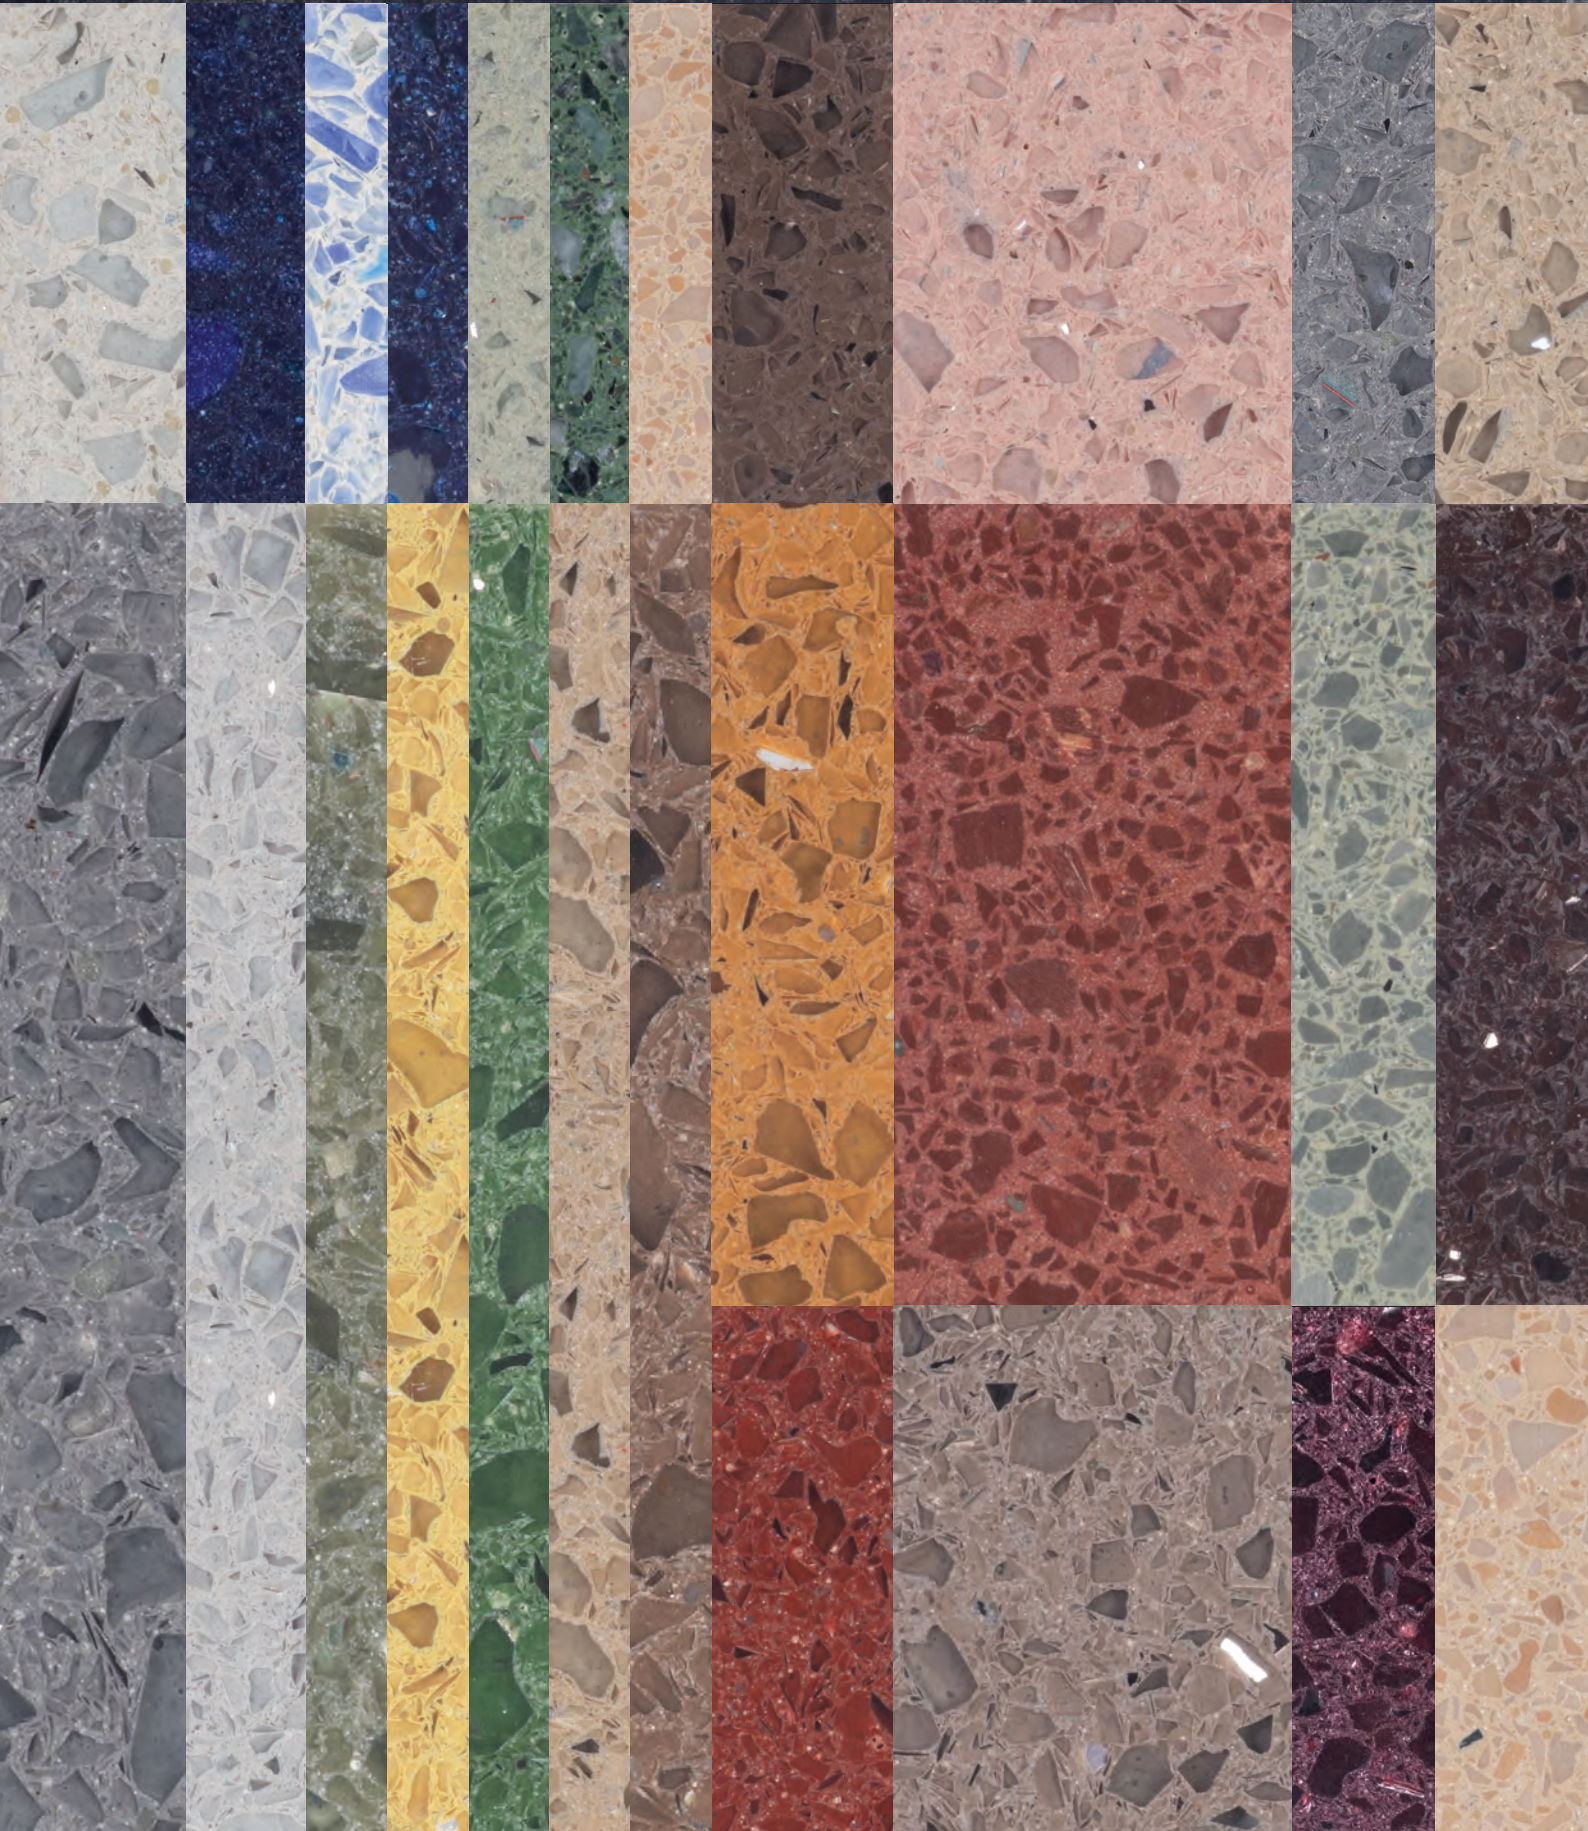


# EPOXY TERRAZZO COLOURS




01



02




03




04



05




06




07




08



09




10




11




12




13




14




15




16




17




18




19




20




21



22




23




24




25




26



27




28




29



30




31




32



33



34



35



36

Note: Colours and chip sizes are indicative. Images are for selection only and not as per actual scale. Please check physical samples.



# EPOXY TERRAZZO PROJECT



Seamless and Exquisite Epoxy Terrazzo Flooring adorns this residence in Mumbai.  
Photography - Studio Kunal Bhatia


# ABOUT EPOXY TERRAZZO

THE BFT EPOXY TERRAZZO SYSTEM IS A PREMIUM DECORATIVE, SEAMLESS EPOXY TERRAZZO FLOOR SCREED, WHICH IS MADE UP OF SPECIALLY FORMULATED RESINS, PIGMENTS, AND A HUGE VARIETY OF AGGREGATES.

The material is poured in place as a 6-10 mm thick decorative, seamless and polishable surface, which combines the ageless beauty of terrazzo with modern, yet environment-friendly materials. The seamless epoxy matrix can be made available in unlimited colour and design options.

## KEY BENIFITS

- Seamless
- Highly crack resistant
- Customised for endless colour choices and combinations
- Great material and finish options
- Fast job completion
- Technically sound, extremely durable

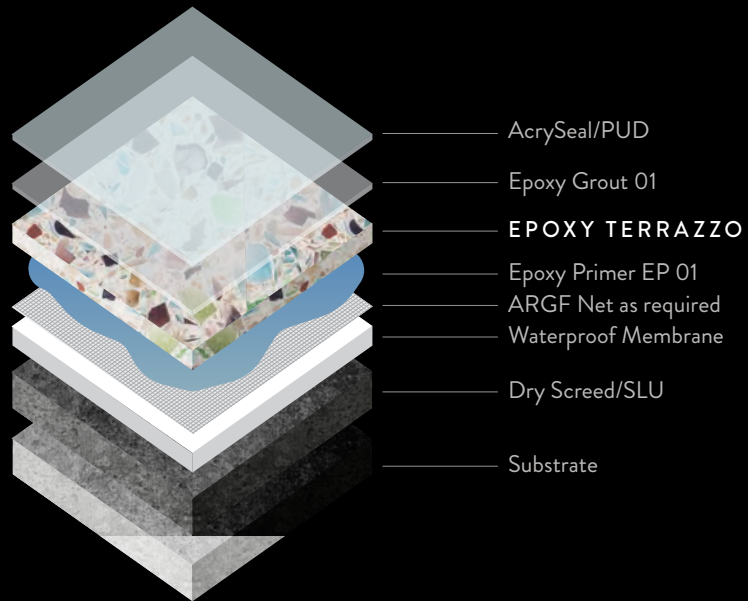

## TECHNICAL SPECIFICATIONS & COLOURS

SPECIFICATION	APPROXIMATE VALUES
Max. Aggregate Size	2-8 mm or as per request
Compressive Strength	>75 N/mm <sup>2</sup>
Flexure Strength	>35 N/mm <sup>2</sup>
Adhesion	Higher than base concrete
Wet Density	~2000 kg/m <sup>3</sup>
Water Absorption	< 0.2%
Work Time	Minimum of 30-60 minutes. Will be less when ambient temperatures exceed 28°C or humidity is less than 50%.



To create your story, drop into our showroom or visit us online.  
We have showrooms located in Mumbai | Delhi | Ahmedabad  
| Vadodara | Goa | Bengaluru | Hyderabad | Pune  
Bharat Floorings & Tiles (Mumbai) Pvt Ltd.  
32, Mumbai Samachar Marg, Next To BSE, Fort, Mumbai 400023  
T: +91 22 40574400/23/44 | E: info@bharatfloorings.com  
W: www.bharatfloorings.com | bharatfloorings | BharatFloors  
ISO 9001: 2015 Certified Company | Brochure Date: October, 2023

